

WEIGH CONTROLLER FOR VIBRATORY **EQUIPMENT**


WEIGH SYSTEM

The SKAKO Weigh System combines the control of the vibratory feeders and the weighing function, to provide either continuous or batch proportioning of most kinds of material used in the Hardware and Automotive Industries.







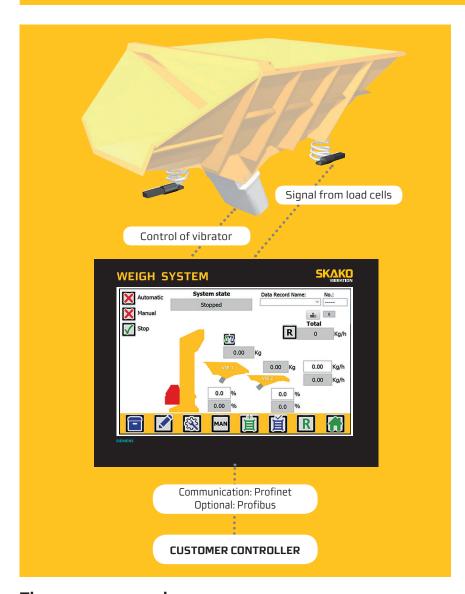

The processes can be:

- Discontinuous/continuous negative weighing
- Positive weighing of charge
- Negative weighing of charge

Features

- Simple and efficient operation via touch screen
- 9" colour display
- Easy adjustment of product data, flow rate/batch weight, refill- and empty limits, vibrator speed etc.
- Recipe control of production data
- Integrated Profinet communication to customer
- Surveillance to avoid overfilling of system


Benefits

- Latest flow calculation algorithm
- Intelligent stroke regulation of vibratory Feeder
- User friendly panel interface
- More advanced settings protected by passwords
- Customer specific factory settings stored as back-up

Options

Profibus communication


MAIN SCREEN



Visual overview of process. Easy access to adjust most common parameter. See total weight, number of weighings.


MANUAL OPERATION SCREEN

See status of lift tipper (if applicable).




Manual control of functions.

RECIPE SCREEN



Recipe to save data for different products.

PRODUCTION DATA SCREEN



Change production data.

www.skako.com 6B/07-03-2012