


Conveyor Type **CCU-NF**

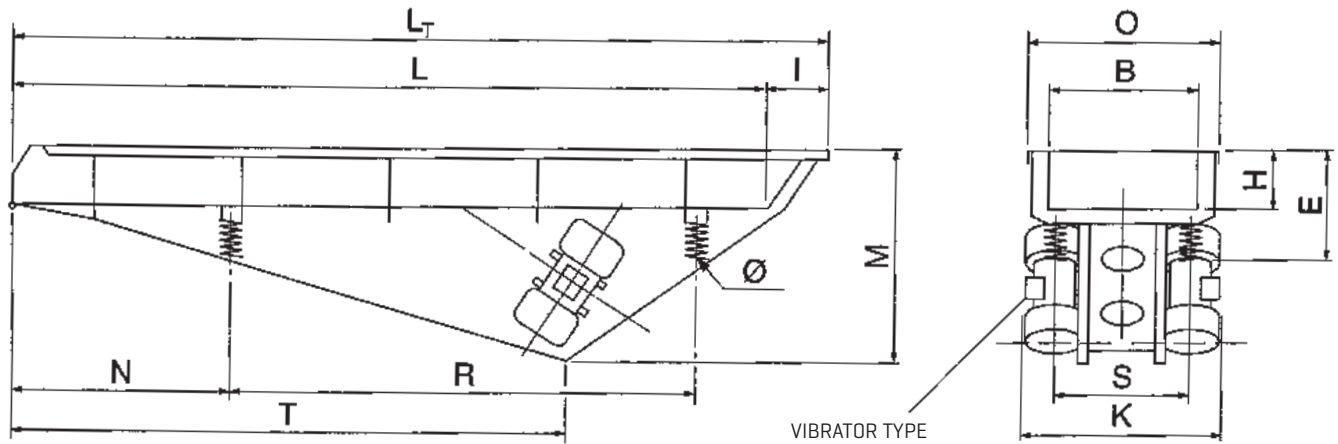

Type	INSTALLATION REQUIREMENTS (mm)														Vib.	Weight		
	B	H	L_T	L		E	I	K		M	N	O	R	S			T	
				Max.	Actual			Max.	Actual									
CCU 020	200	80		4300	6000		90	480				290		170			2) 3)	
CCU 028	280	112		5000	6900		110	550				370		250			2) 3)	
CCU 040	400	160		5900	8200		145	910				510		350			2) 3)	
CCU 056	560	225		6900	9600		185	990				675		500			2) 3)	
CCU 080	800	280		12200	12000		215	1210				920		730			2) 3) 4)	
CCU 100	1000	280		12000	12000		215	1410				1120		920			2) 3) 4)	
CCU 125	1250	280		12000	12000		220	1520				1375		1170			3) 4)	
CCU 160	1600	280		12000			220					1725		1520			3) 4)	
CCU 200	2000	280		12000			225					2135		1920			3) 4)	


29-09-2022

- 2) 4-pole Motors, 1500 rpm [25 Hz]
- 3) 6-pole Motors, 1000 rpm [16 Hz]
- 4) 8-pole Motors, 750 rpm [12,5 Hz]

Please contact us for further information regarding exact dimensions and installations.
SKAKO Vibration retains all rights to change the above specifications without notice.

Conveyor Type **CCU-NF**

CAPACITY

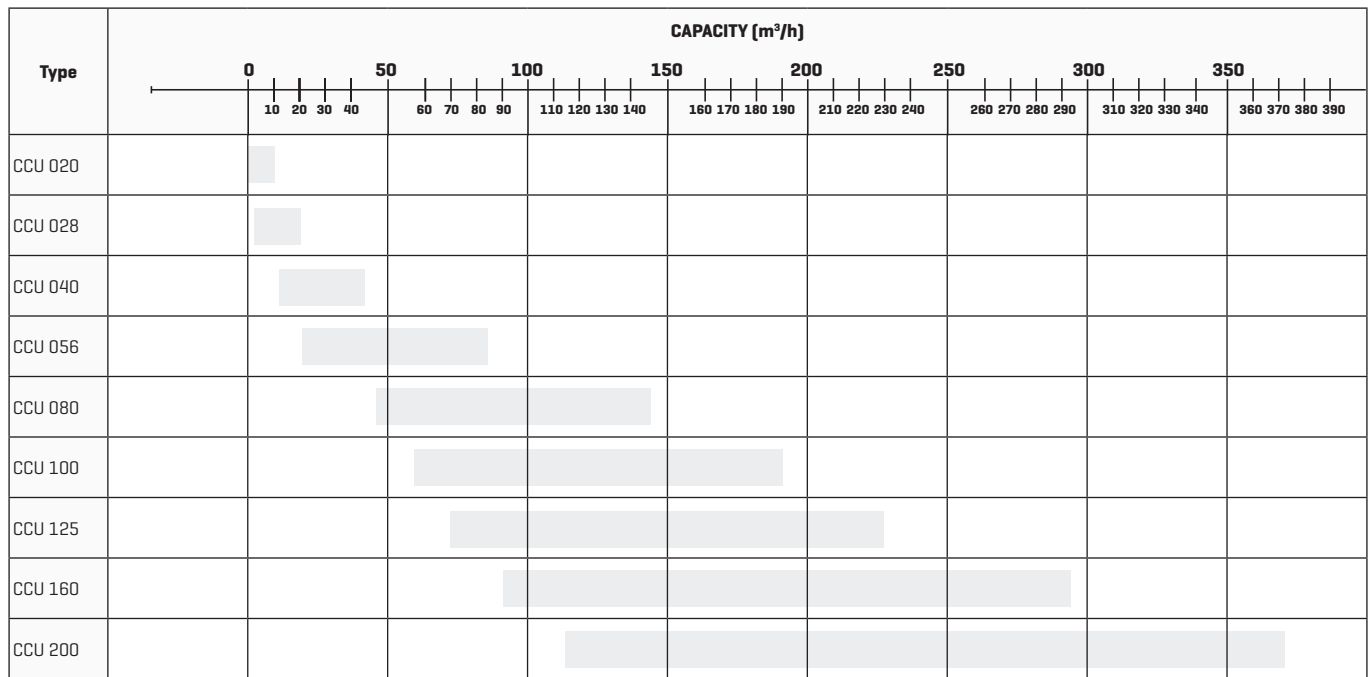

Recommended application

SKAKO VIBRATION retains all rights to change or improve the above specifications without notice

Please contact us for further information regarding exact dimensions and installations.
SKAKO Vibration retains all rights to change the above specifications without notice.