


Conveyor Type COU-NF

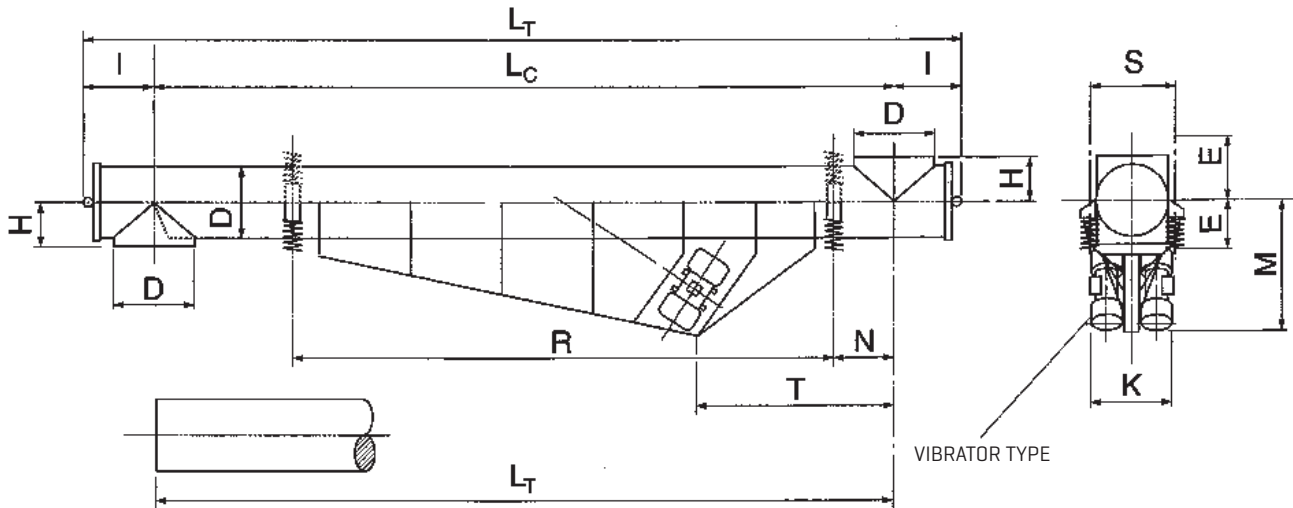

Type	INSTALLATION REQUIREMENTS (mm)														Vib.	Weight
	D_{S1}	L_T	$L_C = L$		E	H	I	K		M	N	R	S	T		
			Max.	Actual				Max.	Actual							
COU 016	160		3400 4700			105	165	480					200		1) 2)	
COU 020 ₇₎	200		3700 5200			125	185	530					250		1) 2)	
COU 022	216		3900 5500			140	200	550					270		1) 2)	
COU 025 ₇₎	250		4200 5900			160	220	910					300		2) 3)	
COU 030 ₇₎	300		4600 6400			190	250	990					370		2) 3)	
COU 032	316		4700 6600 8100			200	260	1210					380		2) 3) 4)	
COU 040	398		7400 9000			250	310	1410					480		3) 4)	
COU 056	546		8700 10700			330	390	1520					640		3) 4)	

22-03-2022


- 1) 2-pole Motors, 3000 rpm [50Hz]
- 2) 4-pole Motors, 1500 rpm [25 Hz]
- 3) 6-pole Motors, 1000 rpm [16 Hz]
- 4) 8-pole Motors, 750 rpm [12,5 Hz]

- 5) Inside Diameter
- 6) E: When conveyor is suspended
- 7) D: For stainless steel exec.

Please contact us for further information regarding exact dimensions and installations.
SKAKO Vibration retains all rights to change the above specifications without notice.

Conveyor Type **COU-NF**

CAPACITY

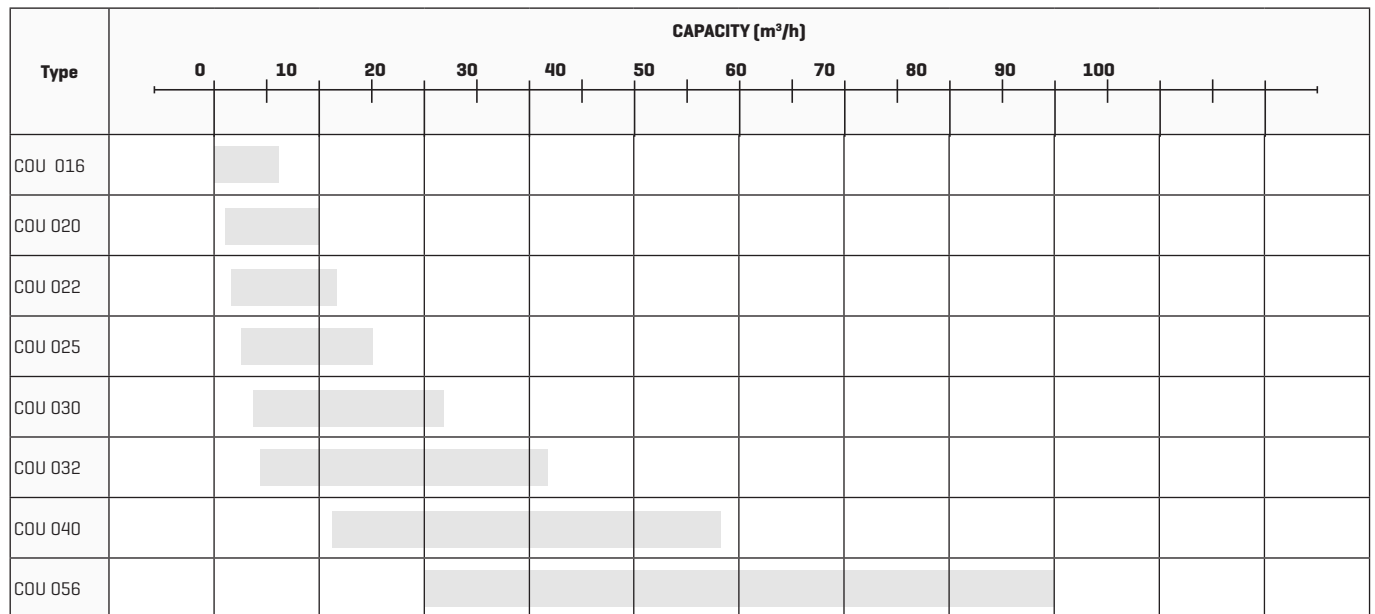

█ Recommended application

Please contact us for further information regarding exact dimensions and installations.
SKAKO Vibration retains all rights to change the above specifications without notice.